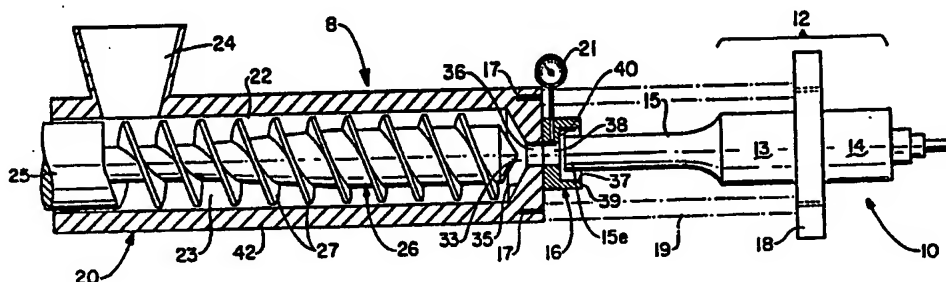


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

BC

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C08F 2/46, 2/56, B06B 1/00	A1	(11) International Publication Number: WO 94/00497 (43) International Publication Date: 6 January 1994 (06.01.94)
(21) International Application Number: PCT/US93/05758 (22) International Filing Date: 16 June 1993 (16.06.93) (30) Priority data: 07/902,074 22 June 1992 (22.06.92) US (71) Applicant: THE UNIVERSITY OF AKRON [US/US]; 302 E. Buchtel Avenue, Akron, OH 44325 (US). (72) Inventors: ISAYEV, Avraam ; 2399 Sourek Rd., Akron, OH 44333 (US). JIANHUA, Chen ; 375 Allyn Street, Akron, OH 44304 (US). (74) Agents: WAGNER, Louis, F. et al.; Oldham, Oldham & Wilson Co., 1225 W. Market St., Akron, OH 44313-7188 (US).		(81) Designated States: AU, BB, BG, BR, CA, CZ, FI, HU, JP, KP, KR, LK, MG, MN, MW, NO, NZ, PL, RO, RU, SD, SK, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: CONTINUOUS ULTRASONIC DEVULCANIZATION OF VULCANIZED ELASTOMERS**(57) Abstract**

This invention relates to a continuous ultrasonic method and apparatus for breaking the carbon-sulfur (C-S), sulfur-sulfur (S-S), and if desired, carbon-carbon (C-C) bonds in a vulcanized elastomer. It is well known that vulcanized elastomers having a three-dimensional chemical network, cannot flow under the effect of heat and/or pressure. This creates a huge problem in the recycling of used tires and other elastomeric products. Through the application of certain levels of ultrasonic amplitudes in the presence of pressure and optionally heat, the three-dimensional network of vulcanized elastomer can be broken down. As a most desirable consequence, ultrasonically treated cured rubber becomes soft, thereby enabling this material to be reprocessed and shaped in a manner similar to that employed with uncured elastomers. The apparatus relates to the ultrasonic reactor (20) (e.g. an extruder). The reactor (20) is connected to an ultrasonic die assembly (10); the die assembly (10) consists of a transducer portion (12), which includes a power converter (14) and booster (13), connected to a horn portion (15), the assembly being supported by mounting bracket (18), and being attached to the reactor (20) through an adaptor portion (19). The reactor (20) includes a barrel (22), fed through hopper (24), the screw (26) within the barrel portion being driven by a drive (25), energized by a motor (28) (not shown). The horn portion (15) includes a die portion (16) through which the devulcanized elastomer being extruded is forced at a pressure shown by a pressure gauge (21). The ultrasonic generator (10) of the ultrasonic die of the invention, movably attached by mounting bracket (18) through adaptor legs (19) to a reactor (20). The reactor (20) is surrounded by a heating jacket (42). Vulcanized material is fed into die (16) through reactor bore exit (36) of exit bore diameter (dr) and into die inlet bore (38) of diameter (di). The vulcanized material is moved under pressure toward die exit bore (37) and leaves through die inlet bore (38).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

1
**CONTINUOUS ULTRASONIC DEVULCANIZATION
OF VULCANIZED ELASTOMERS**

Technical Field

5 This invention relates to an improved apparatus and method for continuous recycling of vulcanized elastomers and thermosets. More particularly, this invention relates to a continuous ultrasonic method for breaking the carbon-sulfur (C-S), sulfur-sulfur (S-S), and if desired, carbon-carbon (C-C) bonds in a vulcanized elastomer.

Background of the Invention

10 It is currently estimated that about 200,000,000 used tires are produced annually. After the useful lifetime of these tires has expired, they are commonly dumped in waste disposal sites, but frequently are discarded on vacant land and in lakes and rivers because the used tires have no value and, in fact, cost money to dispose of properly.

15 In years past, it was possible for waste disposal sites and reclaiming plants to burn the tires and recover the metal or to dump them at a landfill. However, with increasing public awareness of ecology and the state of the environment, both the State Environmental Protection Agencies and the U.S. Government Environmental Protection Agency, have sought to eliminate this form of air and land pollution.

20 The most common traditional method for handling waste materials has been to simply dump the waste on designated land areas thereby creating large and often hazardous dumps in which fires are frequent and runoff into water sources is routine. Not only are these dumps eyesores, they are environmental hazards to both the air and water. It is of no little consequence that while dumps or landfills have often been the cheapest
25 short term way of handling waste material, the land which can be used for this purpose is rapidly running out. This is particularly true in the highly urbanized areas of the industrialized countries. This traditional method of disposing of waste does not allow for the recovery of materials.

30 A particular problem is found in the disposal of rubber based products, such as automotive tires, hoses and belts, all of which are comprised of natural or synthetic rubber reinforced with other materials such as metal belts and fibrous cords. These products

have very little use after they have performed their original and/or primary task and therefore have generally discarded. It is acknowledged that a certain number of tires are used to build retaining walls, guards protecting boating and similar things where resistance to weathering is desirable. However, a far greater number of tires, belts and hoses are simply discarded to become eyesores and breeding grounds for insects and other pests. Burying is particularly ineffective since these materials resist decomposition and tend to work their way to the surface.

There have been many proposals for handling waste materials so as to recover the component products. Some of these included burning off the unwanted material to get at the fire resistant residues or metal substructure. While this may seem to be an answer, it ignores the fact that much useful material would be consumed in burning, that the incineration process itself would not be energy efficient and could release hazardous byproducts into the atmosphere. It also ignores the problem of what to do with the ashes.

Other approaches to material recovery have included rendering the waste material into smaller pieces and then forcibly removing the desirable components. This may be a very difficult task when one considers recovery of material from something such as a tire, which is produced to withstand much abuse without loss of function. Even rendering a tire into smaller pieces would still not enhance the recovery of the metal, fiber and rubber products thereof. Besides a great amount of energy would be consumed in rendering the tire into the smaller pieces.

Still other approaches have involved the use of chemicals to break down the materials into their components. However, these methods create chemical sludges and residues which are not only a nuisance, if not impossible to dispose of, but some chemical treatments are dangerous to both human life and the environment.

Still additional approaches have involved the extensive use of cryogenics to lower the temperature of the product to below the glass-transition temperature of the components thereof. The product at this lowered temperature is then crushed sufficiently to cause the components to release sufficiently to effect separation. However, this is an energy intensive process.

The application of ultrasonic waves to the process of devulcanizing rubber is a

most recent field. In fact, traditional thinking in the field has indicated that rubber is vulcanized by ultrasonics rather than devulcanized. Okada and Hirano published in *Meiji Gomu Kasei*, 9(1), 14-21 (1987) that the ultrasonic vulcanization of rubber was achieved, and that process demonstrated in the laboratory.

5 Additionally, the use of ultrasound to activate rubber-based adhesives was discussed in *Kauch. Rezina*, (5), 31-2 (1983) where the bonding of rubber strips was described. The dynamic strength of the bonded rubber strips was found to increase with increasing ultrasonic activation time.

 Again, the ultrasonic welding of composite polymers was discussed in *Svar. Proizvod.*, (7), 42-3 (1982) where the ultrasonic welding of carbon black-filled rubber was determined to proceed via crosslinking between rubber and the carbon black molecules.

 The vulcanization of rubber and crosslinking of polymers by ultrasound is elaborated in DE 2,216,594 published 10-26-72, based on Japanese priority document JP 71-20736 dated 4-6-71 wherein ethylene-propylene rubber or polybutadiene rubber-natural
15 rubber mixtures; or polymers, e.g. polyethylene containing vulcanization agents or crosslinking agents were vulcanized or crosslinked, respectively, by ultrasonic waves (500 kHz) in a bath containing cold water or silicone oil.

 The application of continuous ultra-high frequency vulcanization to high polarity rubbers, such as chloroprene rubber or butadiene-nitrile rubber is described, *Rubber World*, 162(2), 59-63 (1970).
20

 The only application of ultrasonic waves in a devulcanization mode is described in JP 62121741 (1987). A batch process was described wherein vulcanized rubber was reclaimed by devulcanization by 10 kHz to 1MHz ultrasonic wave irradiation. The batch process required 20 minutes using 50 kHz ultrasonic wave at 500 watts. The process was
25 found to break carbon-sulfur bonds and sulfur-sulfur bonds, but not carbon-carbon bonds.

Disclosure of the Invention

 This invention relates to a continuous ultrasonic method for breaking the carbon-sulfur (C-S), sulfur-sulfur (S-S), and if desired, carbon-carbon (C-C) bonds in a vulcanized
30 elastomer. It is well known that vulcanized elastomers having a three-dimensional

chemical network, cannot flow under the effect of heat and/or pressure. This creates a huge problem in the recycling of used tires and other elastomeric products. It was unexpectedly found that through the application of certain levels of ultrasonic amplitudes in the presence of pressure and optionally heat, the three-dimensional network of vulcanized elastomer can be broken down rather quickly. As a most desirable
5 consequence, ultrasonically treated cured rubber, in the presence of pressure and optionally heat, becomes soft, thereby enabling this material to be reprocessed and shaped in a manner similar to that employed with uncured elastomers.

It is a first object of this invention to detail a continuous process for the
10 devulcanization of vulcanized elastomers.

It is a second object of this invention to detail a continuous process for the devulcanization of vulcanized elastomer particles in which the carbon-sulfur (C-S), sulfur-sulfur (S-S), and if desired, carbon-carbon (C-C) bonds in vulcanized elastomers are broken.

15 It is a third object of this invention to detail a continuous process for the devulcanization of vulcanized elastomers which uses ultrasound.

It is a fourth object of this invention to detail a continuous process for the devulcanization of vulcanized elastomers which uses ultrasound to devulcanize rubbers in the order of seconds or less.

20 It is a fifth object of this invention to detail an apparatus effective for the continuous devulcanization of vulcanized elastomers through a die exit bore populated with an ultrasonic horn.

It is a sixth object of this invention to detail an apparatus effective for the devulcanization of vulcanized elastomers through a plurality of die exit bores, each
25 populated with an ultrasonic horn.

It is a seventh object of this invention to provide a continuous process which is capable of breaking a three-dimensional network of highly crosslinked polymers by the application of ultrasonic waves, pressure and optionally heat, to the crosslinked polymer.

It is an eighth object of this invention to provide an improved ultrasonic horn and
30 die configuration wherein the ultrasonic horn is positioned internal of the die to minimize

the amount of oxidative degradation which occurs during the devulcanization.

These and other objects of this invention will be evident when viewed in light of the drawings, detailed description, and appended claims.

Brief Description of the Drawings

5 The invention may take physical form in certain parts and arrangements of parts, a preferred embodiment of which will be described in detail in the specification and illustrated in the accompanying drawings which form a part hereof, and wherein:

Figure 1 is an elevational view, in cross-section of the ultrasonic reactor along its longitudinal axis;

10 Figure 2 is an exploded cross-sectional plan view of the die of an ultrasonic reactor along its longitudinal axis, the die in this embodiment having a first die inlet bore and a second die exit bore;

Figure 3 is an exploded cross-sectional plan view of the die of an ultrasonic reactor along its longitudinal axis, the die in this embodiment having only a first die inlet
15 bore;

Figure 4 is an exploded cross-sectional view of an alternative configuration of the die of an ultrasonic reactor along its longitudinal axis showing a longitudinal die/horn combination and a radial die/horn combination, each die having a first die inlet bore and a second die exit bore;

20 Figure 5 is an exploded cross-sectional view of an alternative configuration of the die of an ultrasonic reactor along its longitudinal axis showing a longitudinal die/horn combination and an oblique die/horn combination, each die having a first die inlet bore and a second die exit bore;

Figure 6 is an exploded cross-sectional view of an alternative configuration of the
25 die of an ultrasonic reactor along its longitudinal axis showing a longitudinal die/horn combination, a radial die/horn combination and an oblique die/horn combination, each die having a first die inlet bore and a second die exit bore;

Figure 7 is an exploded cross-sectional view of an alternative configuration of the die of an ultrasonic reactor along its longitudinal axis showing a longitudinal die/horn
30 combination, a radial die/horn combination, and an oblique die/horn combination, each die

only having a first die inlet bore;

Figure 8 is a cross-sectional view of an alternative embodiment of the ultrasonic reactor along its longitudinal axis showing a plurality of radial die/horn combinations about the circumference of the reactor with a longitudinal die/horn combination, the reactor not being fitted with any die;

Figure 9 is a graph of viscosity vs. shear rate for vulcanized hydrogenated nitrile rubber pushed through the extruder and devulcanized at various speeds and pressures at a barrel temperature of 200°C and a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C and an ultrasonic wave amplitude of 96 μm : (1) 5 rpm (600 psi); (2) 15 rpm (1,200 psi); (3) 25 rpm (1,800 psi); and (4) uncured (unvulcanized) hydrogenated nitrile rubber;

Figure 10 is a graph of viscosity vs. shear rate for vulcanized hydrogenated nitrile rubber pushed through the extruder and devulcanized at various speeds and pressures at a barrel temperature of 200°C and a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C and an ultrasonic wave amplitude of 82 μm : (1) 5 rpm (600 psi); (2) 10 rpm (700 psi); (3) 15 rpm (1,050 psi); and (4) uncured (unvulcanized) hydrogenated nitrile rubber;

Figure 11 is a graph of viscosity vs. shear rate for vulcanized hydrogenated nitrile rubber pushed through the extruder and devulcanized at various speeds and pressures at a barrel temperature of 200°C and a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C and an ultrasonic wave amplitude of 37 μm : (1) 1 rpm (550 psi); (2) 5 rpm (1,200 psi); and (3) uncured (unvulcanized) hydrogenated nitrile rubber;

Figure 12 is a graph of viscosity vs. shear rate for a vulcanized fluoro-elastomer pushed through the extruder and devulcanized at various speeds and pressures at a barrel temperature of 175°C and a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C and an ultrasonic wave amplitude of 96 μm : (1) 2 rpm (550 psi); (2) 4 rpm (600 psi); (3) 6 rpm (700 psi); and (4) uncured (unvulcanized) fluoro-elastomer;

Figure 13 is a graph of viscosity vs. shear rate for vulcanized SBR/NR-based (styrene butadiene rubber/natural rubber) truck or passenger tire tread peel pushed through the extruder and devulcanized at various speeds, pressures and ultrasonic amplitudes at a barrel temperature of 100°C and a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C: (1) 2 rpm (350 psi), 96 μm ; (2) 2 rpm (500 psi), 82 μm ; (3) 5 rpm (400 psi), 96 μm ; (4)

5 rpm (600 psi), 82 μm ; and (5) 8 rpm (500 psi), 96 μm ;

Figure 14 is an elevational view in vertical cross-section or a top plan view in horizontal cross-section, both being applicable to the apparatus illustrated, of an internal ultrasonic horn contained within an ultrasonic die attachment wherein the entry and exit bores may be interchangeable as desired;

Figure 15 is a graph of viscosity vs. shear rate for original unvulcanized SBR (styrene butadiene) rubber (1); SBR rubber which was vulcanized and subsequently pushed through the extruder and devulcanized using both the external ultrasonic die configuration of Fig. 1 (3); and the internal ultrasonic die configuration of Fig. 14 (2), at a barrel temperature of 120°C, a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C, a screw rotation speed of 30 rpm, and an ultrasonic wave amplitude of 80 μm at 20 kHz;

Figure 16 is a graph of stress-strain curves for original unvulcanized SBR (styrene butadiene) rubber (1); SBR rubber which was vulcanized and subsequently pushed through the extruder and devulcanized using both the external ultrasonic die configuration of Fig. 1 (3); and the internal ultrasonic die configuration of Fig. 14 (2), at a barrel temperature of 120°C, a clearance ($c = l_b - l_p$) of 0.5 mm as measured at 71°C, a screw rotation speed of 20 rpm, and an ultrasonic wave amplitude of 80 μm at 20 kHz;

Figure 17 is a graph of storage modulus (G'), loss modulus (G''), absolute value of dynamic viscosity (η^*), and $\tan \delta$ of decrosslinked ethylene vinyl acetate foam sheets using the internal ultrasonic die configuration of Fig. 14 at a barrel temperature of 200°C, a clearance ($c = l_b - l_p$) of 0.625 mm, a screw rotation speed of 2 rpm, and an ultrasonic wave amplitude of 105 μm at 20 kHz;

Figure 18 is an exploded perspective view, in cross-section of an alternative design, illustrating a non-rounded ultrasonic horn/die configuration wherein one ultrasonic horn is positioned between walls of a die in parallel planes to the longitudinal axis of the reactor; and

Figure 19 is an exploded perspective view, in cross-section of an alternative design, illustrating a non-rounded ultrasonic horn/die configuration wherein two ultrasonic horns are positioned between walls of a die in parallel planes to the longitudinal axis of the reactor.

Detailed Component Part List

	<u>Part Number</u>	<u>Description</u>
	10	ultrasonic generator
	12	transducer
5	13	booster
	14	converter
	15	horn
	16	die
	17	mounting holes
10	18	mounting bracket
	19	adapter legs
	20	reactor
	21	pressure gauge
	22	barrel
15	24	hopper
	25	drive
	26	reactor screw
	27	spiral ridges on shaft
	28	motor (not shown)
20	36	reactor exit bore
	37	die exit bore
	38	die inlet bore
	39	termination point of die
	42	heating jacket
25	44	longitudinal die/horn combination
	46	radial die/horn combination
	48	oblique die/horn combination
	50	internal die/horn combination
	52	gasket
30	54	die void space
	56	die heating and/or cooling coils
	58	die wall
	60	devulcanization zone entry
	62	devulcanization zone exit
35	c	clearance between the exit point of the die inlet bore and the tip of the horn
	d_e	die exit bore diameter
	d_h	horn cross-section diameter
	d_i	die inlet bore diameter
40	d_r	reactor exit bore diameter
	h	height between ultrasonic horns
	l_b	die exit bore depth
	l_p	depth of insertion of ultrasonic horn section measured from the termination point of the die.

Detailed Disclosure of the Invention

Referring now to the drawings wherein the showings are for purposes of illustrating the preferred embodiment of the invention only and not for purposes of limiting the same, the Figures show the effective application of ultrasound to the continuous devulcanization of rubbers.

It is well known that vulcanized elastomers having a three-dimensional chemical network, cannot flow under the effect of heat and/or pressure. It is precisely for this reason that to date, no literature has described the utilization of an extruder in order to further process a vulcanized rubber. This physical property has prohibited the application of extruder technology to the huge problem of recycling used tires and other vulcanized elastomeric products.

However, it has been discovered that through the application of certain levels of ultrasonic amplitudes in the presence of pressure, and optionally heat, the three-dimensional network of vulcanized elastomer can be broken down. As a most desirable consequence, ultrasonically treated cured rubber becomes soft, thereby enabling this material to be reprocessed and shaped in a manner similar to that employed with uncured elastomers.

Figure 1 is a semi-schematic representation of a reactor (e.g. an extruder) or any device which can transport vulcanized rubber while simultaneously exerting pressure on it, generally 20, connected to an ultrasonic die assembly, generally 10, of the invention. As shown, the die assembly 10 consists of a transducer portion 12, which includes a power converter 14 and booster 13, connected to a horn portion 15, the assembly being supported by mounting bracket 18, and being attached to the reactor 20 through an adaptor portion 19. The reactor 20 includes a barrel 22, fed through hopper 24, the screw 26 within the barrel portion being driven by a drive 25, energized by a motor 28 (not shown). The horn portion 15 includes a die portion 16 through which the devulcanized elastomer being extruded is forced at a pressure shown by a pressure gauge 21.

Additionally shown in Figure 1 is ultrasonic generator 10 of the ultrasonic die of the invention, movably attached by mounting bracket 18 through adaptor legs 19 to a reactor 20. As more clearly shown in Figure 2, the horn portion 15 of the ultrasonic die

is shown penetrating to a depth l_p into the die 16 of exit bore depth l_b . The distance between l_p and l_b is critical for the effective operation of the devulcanization process and the difference between the value of l_p , the horn penetration depth, subtracted from l_b , the exit bore depth defines a clearance c through which rubber particles are extruded. If this clearance ($l_b - l_p$) is larger than the rubber particle size, some particles of vulcanized rubber will escape without being devulcanized. On the other hand, if the clearance is too small, the pressure generated in the reactor exit bore may increase and lead to an inability to initiate the ultrasonic generator. There exists some optimal clearance which is dependent upon the size of the rubber particles and/or the thickness of the rubber shreds, and the ultrasonic amplitude, within which optimal conditions of devulcanization can be achieved. In particular, optimal conditions of devulcanization can be achieved when the clearance is between 0.2-0.8 mm, but lower and larger clearances are envisioned.

Additionally, the horn cross-section diameter d_h vis-a-vis the die inlet bore diameter d_i is critical. If the horn cross-section diameter d_h is less than the die inlet bore diameter d_i , then particles of vulcanized elastomer are allowed to pass through die exit bore diameter d_e without any significant devulcanization. In a preferred mode, the relationship will be that the diameter of reactor exit bore d_e will closely approximate the die inlet bore diameter d_i . Additionally, the ultrasonic horn diameter d_h will be greater than die inlet bore d_i , but yet be less than die exit bore d_e .

The energy imparted by the ultrasonic waves in the presence of pressure and optionally heat, imposed on the vulcanized rubber are believed responsible for the fast devulcanization. Thus both wave frequency, as well as amplitude are important processing parameters.

While a die possessing two distinctly different bore diameters d_e and d_i , has been described so far, the invention is not limited to such. Since the key parameter is the relationship between the horn diameter d_h and the die inlet bore d_i , there is no need to have a second exit bore diameter d_e . Figure 3 illustrates this embodiment of the invention.

While an ultrasonic reactor has been generally described so far containing mainly a single die with a single horn inserted therein, there is no reason to limit the invention

to such. As shown in Figures 4-7, multiple combinations of die configurations, in so far as to both the positioning and the number of die/horn combinations are envisioned. The key parameter is that all of the horn/die combinations be co-axial to the longitudinal plane of the zone of devulcanization. With respect to the additional die/horn combinations which are positioned around a reactor exit bore, there is no limit on the upper number of these combinations other than that which is a natural ramification of available space considerations. As seen in Figure 4, the reactor can be equipped with longitudinal die/horn combinations 44 and radial die/horn combinations 46. Figure 5 illustrates the ability to incorporate longitudinal die/horn combinations 44 with oblique die/horn combinations 48. And Figure 6 shows a die configuration wherein a longitudinal die/horn combinations 44 is positioned in concert with a radial die/horn combination 46 and an oblique die/horn combination 48. Figure 7 illustrates the ability to perform the invention with a die possessing only a die inlet bore d_i .

In a similar manner to the relationship between the dies shown in Figures 2 and 3, when multiple dies are utilized, such as in Figures 4 - 7, there is also no necessity for the dies to have dies possessing two different bore diameters. As with the single die configuration, since the key parameter is the relationship between the horn diameter d_h and the die inlet bore d_i , there is no need to have a second exit bore diameter d_e . Figure 7 illustrates this embodiment of the invention.

In another embodiment of the invention, and since the diameter of the reactor exit bore d_r closely matches the die inlet bore diameter d_i , in some instances, for reactors which have been specifically designed for this purpose, there is no need for a die attached to an exit bore. This arrangement is shown in Figure 8. In this arrangement, a plurality of radial die/horn combinations 46 are situated at the periphery of the circumference of the longitudinal axis of reactor 20. As with the previous arrangements, the clearance between the periphery of the reactor exit bore and the tip of the ultrasonic horn is positioned at a distance which is maximized by experiment. Typically this clearance is between 0.2 mm - 0.8 mm, although both larger and smaller clearances are envisioned under appropriate conditions. Unlike previous embodiments described, there is no absolute need to position a die/horn combination at the reactor exit bore, and in this

embodiment, the longitudinal die/horn combination is optional.

Considerable latitude is permissible in selecting the wave frequency and amplitude, and as suggested in the preceding, optimum conditions for a particular polymer are best determined by experimental trials conducted on the rubber of interest. Within such
5 considerations, however, it has been found that the frequency of the waves should be in the ultrasonic region, i.e., at least 15 kilohertz, and a range of from about 15 kHz to 50 kHz is preferable. The amplitude of the wave can be varied up to an amplitude of at least about 10 microns to about 200 microns, again, the exact amplitude and frequency best suited for a particular application being readily determined by experimentation.

10 The exact location of the point of attachment of the mounting bracket 18 and the length of adaptor legs 19 in relation to the horn 15 is important. It has been determined that depth to which the tip of the horn 15 is inserted into the die exit bore d_e is determined by the devulcanization characteristics of the compound, and particularly on its ability to dissipate ultrasonic energy. In a preferred embodiment, the distance separating
15 the tip of the ultrasonic horn 15 and the terminal point of the die inlet bore d_i is about 0.2-0.8 mm, but larger and smaller clearances are possible.

The reactor is surrounded by a heating jacket 42 which may depend upon electrical heating elements, or heat transfer media of the type well known in the art. The purpose of the jacket is to lower the pressure within the reactor generated by the vulcanized
20 elastomeric particles which are pushed to the reactor exit bore d_r . In an unheated mode, the reactor pressure at the extruder exit bore d_r becomes inordinately high leading to overload of the ultrasonic wave generator.

In an alternative embodiment, the most preferred embodiment known to the inventors to date and shown in Fig. 14, the ultrasonic horn / die combination 50,
25 illustrates that, unlike the configuration shown initially in Fig. 1, the ultrasonic horn 10 is positioned internally in die 16. Vulcanized material is fed into die 16 through reactor bore exit 36 of exit bore diameter d_r and into die inlet bore 38 of diameter d_i . Positioned transverse to the longitudinal axis of reactor 20 is ultrasonic generator 10 containing transducer 12 with components converter 14 and booster 13, and horn 15. The vulcanized
30 material is moved under pressure through internal die void space 54 toward die exit bore

37 due to the forward pressure generated by reactor screw 26 within reactor 20. Movement of the vulcanized material is precluded from migration toward the converter end 14 of ultrasonic generator 10 by the presence of gasket 52 which sealingly prohibits the flow of material. The gasket material can be of any composition which effects a pressure-tight seal, and often is made of teflon. The die pressure is measured via pressure gauge 21. The die is optionally heated and/or cooled, depending upon the material to be devulcanized or material to be decrosslinked. While the positioning of the ultrasonic horn is shown transverse to the longitudinal axis of the reactor, it is equally possible to position the ultrasonic horn at oblique angles to the longitudinal axis of the reactor.

10 As the vulcanized material approaches the tip of horn 15, the material flows into the path of the ultrasonic waves generated by the horn due to the diameter of the horn d_h being larger than that of die exit bore d_e . The internal arrangement of the horn within the die allows the devulcanization to proceed in an environment which is not exposed to atmospheric oxygen, thereby minimizing the amount of product degradation which might otherwise occur with for example, the arrangement shown in Fig. 1.

15 As discussed previously in association with Fig. 1, the clearance, c , preferred between the tip of horn 15 and the beginning of die exit bore 37 is between 0.2 - 0.8 mm, but larger and smaller clearances are envisioned. The clearance necessary being a function of the speed of the reactor screw, with associated generated pressure. Additionally, the horn cross-sectional diameter d_h will preferably be greater than die exit bore d_e . In this configuration, particles of the vulcanized elastomer would be required to pass through die exit bore under sufficient pressure and in the ultrasonic wave path to insure devulcanization.

25 While a preferred embodiment has been described in regard to Fig. 14, it is envisioned that when the ultrasonic horn is internal of the die, the designations of die inlet and die exit bores can be interchanged and that it is equally possible to operate the devulcanization reaction when the vulcanized material is fed from reactor 20' (analogous to reactor 20), through die exit bore 37 and leaves through die inlet bore 38 of Fig. 14.

In Fig. 18, an alternative embodiment of the ultrasonic horn/die is shown wherein one non-circular ultrasonic horn 10 is positioned along parallel planes to the longitudinal

30

axis of the reactor 20. The ultrasonic horn is separated by a height, h from its opposed die wall. In order to effect the devulcanization and/or decrosslinking reaction, it will be seen, from the previous discussions, that similar constraints to that imposed on the definition of the clearance, c , are correspondingly applicable to the height, h . In general, the value of the height will be essentially that previously defined for c , thereby permitting material to be processed through the parallel-spaced ultrasonic horn by the ingress through devulcanization zone entrance and egress through the devulcanization zone exit.

In Fig. 19, an alternative embodiment of the ultrasonic horn/die is shown wherein two non-circular ultrasonic horns 10 is positioned along parallel planes to the longitudinal axis of the reactor 20. The ultrasonic horns are separated by a height, h from their opposed surfaces. In order to effect the devulcanization and/or decrosslinking reaction, it will be seen, from the previous discussions, that similar constraints to that imposed on the definition of the clearance, c , are correspondingly applicable to the height, h . In general, the value of the height will be essentially, twice the value for the clearance, thereby permitting additional material to be processed through the parallel-spaced ultrasonic horns by the ingress through devulcanization zone entrance and egress through the devulcanization zone exit.

Examples

Samples of hydrogenated nitrile rubber (HNBR) containing 50 parts of carbon black, 25 parts clay, and various other additives (e.g. accelerator, antioxidant, and curatives known to those skilled in the art), and fluorocarbon polymer (FCP) containing 30 parts silica and various other additives known to those skilled in the art, were vulcanized by using a compression molding technique. The compositions were compression molded and vulcanized into slabs. Specifically, the following conditions were employed.

HNBR	350°F for 5 minutes at 250 PSIG.
FCP	350°F for 5 minutes at 250 PSIG, followed by 450°F for 10 hours in an oven.

The vulcanized slabs were subsequently cut into pieces or strands of nominal size

approximately (15mm x 5mm x 3mm) and pieces placed in the hopper of a one inch single screw extruder for thermoplastics operating at various rotation speeds detailed in the following examples and extruded through a 0.5 mm die clearance under pressure, with an ultrasonic horn of 12.7 mm diameter operating at 20 kHz and various wave amplitudes.

- 5 While the following examples used primarily pieces of vulcanized rubber, the use of longer or shorter strands and/or particles is envisioned.

After passing the vulcanized elastomers through the heated extruder operating at 200°C and 175°C for HNBR and FCP, respectively, the devulcanized elastomers were collected and analyzed. In order to perform the analysis, a sample was prepared from the
10 collected material by compression molding at room temperature for 10 minutes at approximately 250 psig. The viscosity characteristics of the devulcanized compounds were measured.

The viscosity vs. shear rate measurements were made at 71°C using a modified multi-speed Mooney rheometer (Monsanto).

15

Example 1

A series of devulcanization runs were performed on hydrogenated nitrile rubber compound. Pieces of this material were fed into the extruder operating at a barrel temperature of 200°C and a die clearance of 0.5 mm and an ultrasonic wave amplitude
20 of 96 μm at 20 kHz. The extruder screw was operated at speeds of (1) 5 rpm; (2) 15 rpm; and (3) 25 rpm. Pressure generated by the extruder were 600, 1,200, and 1,800 psi respectively. For comparative purposes, an uncured hydrogenated nitrile rubber compound (4) was tested. The results are graphed in Figure 9 as a series of plots on a graph of the log of the viscosity (η) vs. the log of the shear rate (γ).

25 As is seen in Figure 9, reference compound (4) illustrates a base comparative case of the original unvulcanized material. Evident in viewing the curves for compounds (1), (2), and (3), the application of ultrasonic waves of amplitude 96 μm has totally devulcanized the materials. Additionally seen from the figure is the fact that the lower the screw rotation speed, the greater the degree of carbon-carbon bond breaking. This is
30 shown in the lowered position of the curves in relation to the base comparative case (4).

The application of ultrasonics has not only devulcanized the material, but also lowered the molecular weight of the elastomer, indicating the breaking of carbon-carbon bonds within the polymeric chain.

The lower the rotation speed of the screw, which translates to a longer residence
5 time of the elastomer in the ultrasonic field, the greater the degree of depolymerization.

Example 2

To test the effect of the ultrasonic wave amplitude, a series of runs were made at a lowered amplitude of 82 μm for screw speeds of (1) 5 rpm (600 psi); (2) 10 rpm (700
10 psi); and (3) 15 rpm (1,050 psi). The samples were prepared in a manner analogous to Example 1. As shown in Figure 10, a similar set of data was obtained indicating the effectiveness of the ultrasonic treatment at a lowered amplitude.

Example 3

The ultrasonic wave amplitude was decreased further to 37 μm in a series of runs plotted in Figure 11 for screw speeds of (1) 1 rpm (550 psi); and (2) 5 rpm (1,200 psi); and generated in a manner similar to that employed with Example 1. As illustrated in the graph, the data clearly indicates that lower wave amplitudes, coupled with longer residence times cooperatively interact to facilitate not only devulcanization, but to also
20 significantly depolymerize the elastomer as shown at a revolution speed of 1 rpm.

Example 4

A series of devulcanization runs were performed on fluorocarbon elastomer compound. Pieces of this material were fed into the extruder operating at a barrel
25 temperature of 175°C and a die clearance of 0.5 mm and an ultrasonic wave amplitude of 96 μm at 20 kHz. The extruder screw was operated at speeds of (1) 2 rpm; (2) 4 rpm; and (3) 6 rpm. Pressures generated by the extruder were 550, 600, and 700 psi respectively. For comparative purposes, an uncured fluorocarbon elastomer compound (4) was tested. The results are graphed in Figure 12 as a series of plots on a graph of the log
30 of the viscosity (η) vs. the log of the shear rate ($\dot{\gamma}$).

As is seen in the Figure, reference compound (4) illustrates a base comparative case when the material is unvulcanized. Evident in viewing the curves for compounds (1), (2), and (3), the application of ultrasonic waves of amplitude 96 μm has once again, totally devulcanized the materials. Additionally seen from the figure is the fact that the lower the screw rotation speed, the greater the degree of carbon-carbon bond breaking. This is shown in the lowered position of the curve observed for a screw speed of 2 rpm in relation to the base comparative case (4). The application of ultrasonics has not only devulcanized the material, but also lowered the molecular weight of the elastomer, indicating the breaking of carbon-carbon bonds within the polymeric chain.

The lower the rotation speed of the screw, which translates to a longer residence time of the elastomer in the ultrasonic field, the greater the degree of depolymerization.

Example 5

To test the effectiveness of the technique on a passenger car tire tread compound, a sample of vulcanized rubber based on styrene-butadiene rubber/natural rubber compound was obtained from Rony Inc., Akron, Ohio. The particle size of the material was nominally 0.1 - 0.05". Pieces of this vulcanized material were fed into the extruder operating at a barrel temperature of 100°C and a die clearance of 0.5 mm and ultrasonic wave amplitudes of 96 μm and 82 μm at 20 kHz. The extruder screw was operated at various speeds of 2 rpm, 5 rpm, and 8 rpm at various pressures. As is evidenced by the fact that these materials exhibit flow curves at all (Figure 13), is strong evidence that devulcanization has occurred since the original vulcanized SBR/NR-based material does not flow at all. Based upon the previous figures, it is anticipated that some amount of carbon-carbon bond breaking has also occurred.

25

Example 6

A sample of styrene-butadiene rubber (SBR) containing curatives, was vulcanized at 170°C for 12 min. in a compression molding press at about 250 psig and quenched in a mold having internal dimensions of 20 x 20 x 0.3 cm³. Prepared plates were cut into pieces which were fed into a single screw extruder with an external (Fig. 1) and internal

30

(Fig. 14) ultrasonic horn/die configuration. The reactor barrel temperature was 120°C with a screw rotation speed of 30 rpm. The die clearance was 0.5 mm and ultrasonic waves of 80 μ m at 20 kHz. An ultrasonic horn diameter of 12.7 mm was used and the inlet diameter into the zone of devulcanization was 19 mm. The outer diameter for the extrudate was 6.35 mm. During passage through the clearance, the vulcanized SBR was devulcanized, collected and analyzed.

The viscosity of the devulcanized SBR rubber obtained by using the external and internal dies, as well as the viscosity of the original unvulcanized SBR rubber were measured using a modified multi-speed Mooney rheometer (Monsanto). The results are shown in Fig. 15 as a series of plots of the log of the viscosity vs. the log of the shear rate. As shown in the Figure, the viscosity of devulcanized SBR rubber obtained with the internal die arrangement is higher than that obtained with the external arrangement. This indicates that there is less degradation taking place simultaneously with the devulcanization reaction.

The devulcanized SBR rubber was subsequently mixed with curatives and vulcanized again in a compression molding press at the same conditions as in the first vulcanization. Rubber plates were prepared which were subsequently cut into strips for the stress-strain measurements. These measurements were performed using a Monsanto Tensiometer. Fig. 16 shows the stress-strain curves for the original vulcanized SBR rubber and revulcanized SBR rubber which was devulcanized previously in both the external and internal horn/die configuration. It is clearly seen that the SBR rubber devulcanized in the internal horn/die arrangement, and then subsequently revulcanized, has the better stress-strain characteristics than the SBR rubber which had been devulcanized in the external horn/die arrangement, and then subsequently revulcanized.

25

Example 7

Crosslinked ethylene vinyl acetate foam sheets (Evalite 3S), supplied by Monarch Rubber Company were cut into strands and fed into a single screw extruder with ultrasonic die attachment. A barrel and die temperature were maintained at 200°C. A screw rotation of 2 rpm was used with a die clearance of 0.625 mm and ultrasonic wave

30

amplitude of 105 μm at 20 kHz. an ultrasonic horn of 12.7 mm diameter was used. The inlet diameter into the zone of decrosslinking was 19 mm and the outlet diameter for the extrudate was 6.35 mm. The collected decrosslinked material was a solid at room temperature. This decrosslinked material was compression molded into sheets of dimensions 15 x 10 x 0.2 cm^3 at a temperature of 175°C, using a preheating time of 5 min. and a holding time of 5 min. at 4,500 psig. The ability of the decrosslinked material to be molded is a strong indication that the material can flow. From these sheets, disks of 2 cm diameter were punched for rheological studies by means of a Rheometrix Mechanical Spectrometer. Various frequencies and constant amplitude (3%) were used at a temperature of 125°C. As shown in Fig. 17, the decrosslinked material showed rheological behavior typical of flowable thermoplastics as indicated by the storage modulus (G'), loss modulus (G''), absolute value of dynamic viscosity (η^*), and $\tan \delta$ of the decrosslinked material.

Discussion

As is evident from Figures 9-13, and 15-17, the devulcanization of rubbers and decrosslinking of crosslinked polymers, occurs rapidly, and quantitatively. In all instances, comparisons of the curve generated for unvulcanized material, with that generated from material which had been processed (devulcanized), indicated that the processed material curves never exceeded the unvulcanized standard. The occurrences of the lowered positioning of the curves in the Figures in relation to the unvulcanized standard, is due to the possibility of additionally breaking carbon-carbon bonds in the polymer if desired. The amount of carbon-carbon bond breakage is a controllable parameter and is dependent upon the factors of pressure and most particularly, on the residence time that the material spends in the zone of devulcanization. Devulcanization occurs very fast, typically within 0.1 - 10 seconds.

The type of rubber which is devulcanized can be of the polar or non-polar type. Without being limited to any enumerated list, some representative types of polar rubbers which are contemplated within the scope of this invention are chloroprene and nitrile rubbers. Again without being limited to any enumerated list, some representative types of non-polar rubbers which are contemplated within the scope of this invention are

styrene-butadiene rubbers (SBR), natural rubber, ethylene-propylene rubbers, butadiene rubbers, isoprene rubbers, butyl rubbers, silicone rubbers and fluorocarbon rubbers.

While the initial focus of the discussion has been directed to the continuous devulcanization of rubbers, the invention is not limited to such. It is within the scope of this invention to include the application of ultrasonic waves to the breaking of 3-dimensional crosslinked polymeric networks in thermosets. Without being limited to the enumerated examples, a few representative systems would include polyurethanes, epoxy/phenolic resins, epoxy resins, saturated polyester resins, unsaturated polyester resins, phenolic/formaldehyde resins, etc.

While the figures and ensuing discussion have focused in particular on the application of an extruder to move the original vulcanized material to the extruder exit bore, there is no reason to limit the invention to such. In fact, the only requirements essential for the extruder section of the reactor is that it be capable of moving material under pressure toward the reactor outlet bore and into a receiving die inlet bore. Optionally, the reactor should be capable of being heated. The heating of the reactor tends to decrease the internal pressure generated at the exit bore of the reactor, and reduction of power consumption of the motor.

In its simplest mode of operation, the reactor is fitted at its exit bore with a die having one inlet bore and one exit bore. However, there is no reason to limit the invention to such. It is contemplated and within the scope of the invention to utilize multiple die inlet and exit bores originating off a common die receiving bore. When used in this fashion, it becomes possible to increase the throughput (amount of devulcanized material collected in a unit of time) significantly. One of the simplest methods of accomplishing this is to include additional exit bores positioned radially around the die. However, it is contemplated within the scope of the invention that other positioned dies and horns are possible. The key element is the alignment of the longitudinal axis of the ultrasonic horn with the axis of the exit bore of the reactor and/or inlet bore of the die.

While in describing the term die in this application, the term has been used to denote a separate component of the apparatus, there is no need to specifically limit the concept as such. In fact, it is quite possible that a device could be constructed which

incorporates a die into the physical unit itself, without the need for any separate component. However, for ease of cleaning and routine maintenance, it is anticipated that the die would typically be a separate unit attached to the exit bore of the reactor.

It is also possible and within the scope of the invention to omit the die portion
5 attached to the extruder. When in this configuration, the key parameter is that the diameter of the horn be larger than that of the exit bore of the reactor. The die arrangement is typically used for convenience in adapting existing equipment (i.e. extruders) to this application.

While the configuration of the die and/or reactor exit bore has been generally
10 referred to as cylindrical or spherical in shape, there is no reason to limit the invention to such. It is possible to use other geometrically shaped dies and/or reactor exit bore shapes with the invention. Without being limited, it is contemplated that other geometrical shapes, such as rectangular slits, oval slits, etc., can be effectively used in the application. It is also within the scope of the invention that the die and/or reactor exit
15 bore be of constant dimensions, or varying dimensions. The initial dimensions of a rectangular slit, for example may in effect be larger at the inlet side, than they are at the exit side. It is also contemplated within the scope of the invention that irregular shaped exit bores can be accommodated. The critical parameter is that the surface area of the horn be sufficient to be capable of being positioned over the exit bore shape, whether the
20 exit bore is that of the reactor or that of the die.

The effective devulcanization of the rubber requires a careful analysis of the die inlet bore diameter, the die exit bore diameter and the ultrasonic horn diameter. In order to effectively devulcanize the material, it is critical that the horn diameter be larger than the die inlet bore, yet smaller than the die exit bore. This arrangement permits the die to
25 be inserted to a depth into the die exit bore which effectively devulcanizes the material, yet simultaneously does not generate an inordinate amount of pressure within the die of the reactor, thereby causing the horn to stop vibrating.

While in accordance with the patent statutes, a preferred embodiment and best mode has been presented, the scope of the invention is not limited thereto, but rather is
30 measure by the scope of the attached claims.

What is Claimed is:

1. An ultrasonic reactor comprising:
 - (a) a reactor having at least one reactor exit bore capable of continuously feeding vulcanized or crosslinked elastomeric particles under pressure to the reactor exit bore;
 - (b) at least one ultrasonic horn;
 - (c) at least one attachment means for attaching each ultrasonic horn to the reactor and in a linear relationship to a longitudinal axis of the reactor exit bore;
 - (d) an ultrasonic wave generator at one end of each ultrasonic horn, a diameter of the wave generator being larger than the diameter of the reactor exit bore, the ultrasonic wave generator additionally being positioned at a clearance distance as measured along a longitudinal axis between a transverse plane demarking a termination of the reactor exit bore and a transverse plane demarking a tip of the ultrasonic wave generator, sufficient to effect devulcanization or decrosslinking of the elastomer.

2. An ultrasonic reactor comprising:
 - (a) a reactor having at least one reactor exit bore capable of continuously feeding vulcanized or crosslinked elastomeric particles under pressure to the reactor exit bore;
 - (b) at least one die having a die entrance bore and a die exit bore, the die entrance bore being of smaller diameter than the die exit bore, the die being attached to the reactor so as to permit the passage of the vulcanized elastomeric particles from the reactor exit bore into the die entrance bore;
 - (c) an ultrasonic horn for each die;
 - (d) at least one attachment means adapted to attaching the ultrasonic horn to each die and in a linear relationship to a longitudinal axis of the entrance bore of die;
 - (e) an ultrasonic wave generator at one end of each horn, a diameter of the

wave generator being larger than the diameter of the die entrance bore and smaller than the diameter of the die exit bore, the ultrasonic wave generator additionally being positioned at a clearance distance as measured in a longitudinal axis between a transverse plane demarking a termination of the die entrance bore and a transverse plane demarking a tip of the ultrasonic wave generator, sufficient to effect devulcanization or decrosslinking of the elastomer.

3. An ultrasonic reactor comprising:

- (a) a reactor having at least one reactor exit bore capable of continuously feeding vulcanized or crosslinked elastomeric particles under a pressure to the reactor exit bore;
- (b) at least one die having a die entrance bore, a die exit bore and an internal die void connecting the die entrance and exit bores, the die being attached to the reactor so as to permit the passage of the vulcanized elastomeric particles from the reactor exit bore into the die entrance bore;
- (c) at least one ultrasonic horn adapted for insertion into each die void, each die void configured so as to be in a non-linear alignment with a longitudinal axis of the reactor;
- (d) at least one attachment means adapted to attaching each ultrasonic horn into the die void and in a linear relationship to a longitudinal axis of the die exit bore;
- (e) at least one gasket for sealingly engaging each ultrasonic horn to the die; and
- (f) an ultrasonic wave generator at one end of each horn, a diameter of the wave generator being larger than the diameter of the die exit bore, the ultrasonic wave generator additionally being positioned at a clearance distance as measured in a longitudinal axis between a transverse plane demarking a termination of the ultrasonic wave generator tip and a transverse plane demarking the beginning of the die exit bore, sufficient to

effect devulcanization or decrosslinking of the elastomer.

4. An ultrasonic reactor comprising:
 - (a) a reactor having at least one reactor exit bore capable of continuously feeding vulcanized or crosslinked elastomeric particles under a pressure to the reactor exit bore;
 - (b) at least one die having a die entrance bore, a die exit bore and an internal die void connecting the die entrance and exit bores, the die being attached to the reactor so as to permit the passage of the vulcanized elastomeric particles from the reactor exit bore into the die entrance bore;
 - (c) at least one ultrasonic horn adapted for insertion into each die void, each die void configured so as to be in a non-linear alignment with a longitudinal axis of the reactor;
 - (d) at least one attachment means adapted to attaching each ultrasonic horn into the die void and in a linear relationship to a longitudinal axis of the die exit bore;
 - (e) at least one gasket for sealingly engaging each ultrasonic horn to the die; and
 - (f) an ultrasonic wave generator at one end of each horn, a diameter of the wave generator being larger than the diameter of the die exit bore, the ultrasonic wave generator additionally being positioned at a clearance distance as measured in a longitudinal axis between a transverse plane demarking a termination of the ultrasonic wave generator tip and a transverse plane demarking the beginning of the die exit bore, sufficient to effect devulcanization or decrosslinking of the elastomer.
5. The reactor of claims 1 or 2 or 3 or 4 wherein the clearance distance is 0.2mm to 0.8mm.
6. The reactor of claims 1 or 2 or 3 wherein at least one ultrasonic horn is in a non-

linear alignment to the longitudinal axis of the reactor.

7. An ultrasonic reactor comprising:
 - (a) a reactor having at least one reactor exit bore capable of continuously feeding vulcanized or crosslinked elastomeric particles under pressure to the reactor exit bore;
 - (b) a die chamber having at least two parallel-spaced die walls attached to the reactor and to a die exit wall, at least two parallel-spaced ultrasonic wave generator surfaces of two ultrasonic horns, in associative contact with the two die walls and die exit wall, creating a channel through which elastomeric particles can be fed and exited through an exit bore in an exit wall;
 - (c) at least two spacing means for attaching each ultrasonic horn to the die walls and permitting variable positioning of the ultrasonic wave generator surfaces in a linear relationship to a longitudinal axis of the reactor exit bore, thereby creating a clearance distance as measured between the two parallel wave generator surfaces sufficient to effect devulcanization or decrosslinking of the elastomer.
8. The reactor of claim 7 wherein the clearance distance is 0.2mm to 1.6mm.
9. An ultrasonic reactor comprising:
 - (a) a reactor having at least one reactor exit bore capable of continuously feeding vulcanized or crosslinked elastomeric particles under pressure to the reactor exit bore;
 - (b) a die chamber having at least a first two parallel-spaced die walls attached to the reactor and to a die exit wall, at least one ultrasonic wave generator surface of at least one ultrasonic horn in a parallel-spaced relationship with a third die wall, both the wave generator surface and third die wall in associative contact with the first two parallel-spaced die walls and die exit

wall, creating a channel through which elastomeric particles can be fed and exited through an exit bore in an exit wall;

- (c) at least one spacing means for attaching the ultrasonic horn to the die wall and permitting variable positioning of the ultrasonic wave generator surfaces in a linear relationship to a longitudinal axis of the reactor exit bore, thereby creating a clearance distance as measured between the wave generator surface and third wall sufficient to effect devulcanization of the elastomer.
10. The reactor of claim 9 wherein the clearance distance is 0.2mm to 0.8mm.
11. A continuous process for the recycling of vulcanized elastomeric particles comprising the steps of:
- (a) feeding vulcanized elastomeric particles into a pressurized zone of devulcanization; and
 - (b) ultrasonically treating the elastomers in the zone of devulcanization with an ultrasonic wave propagated co-axially with the zone of devulcanization for a time from about 0.1 seconds to about 10 seconds to effect devulcanization thereby breaking at least a covalent bond selected from the group consisting of a carbon-sulfur bond and a sulfur-sulfur bond.
12. A continuous process for the breaking of a crosslinked thermoset polymer comprising the steps of:
- (a) feeding crosslinked thermoset polymer into a pressurized zone of crosslinked bond breaking; and
 - (b) ultrasonically treating the polymer in the zone of crosslinked bond breaking with an ultrasonic wave propagated co-axially with the zone of crosslinked bond breaking for a time from about 0.1 seconds to about 10 seconds to effect the crosslinked bond breaking.

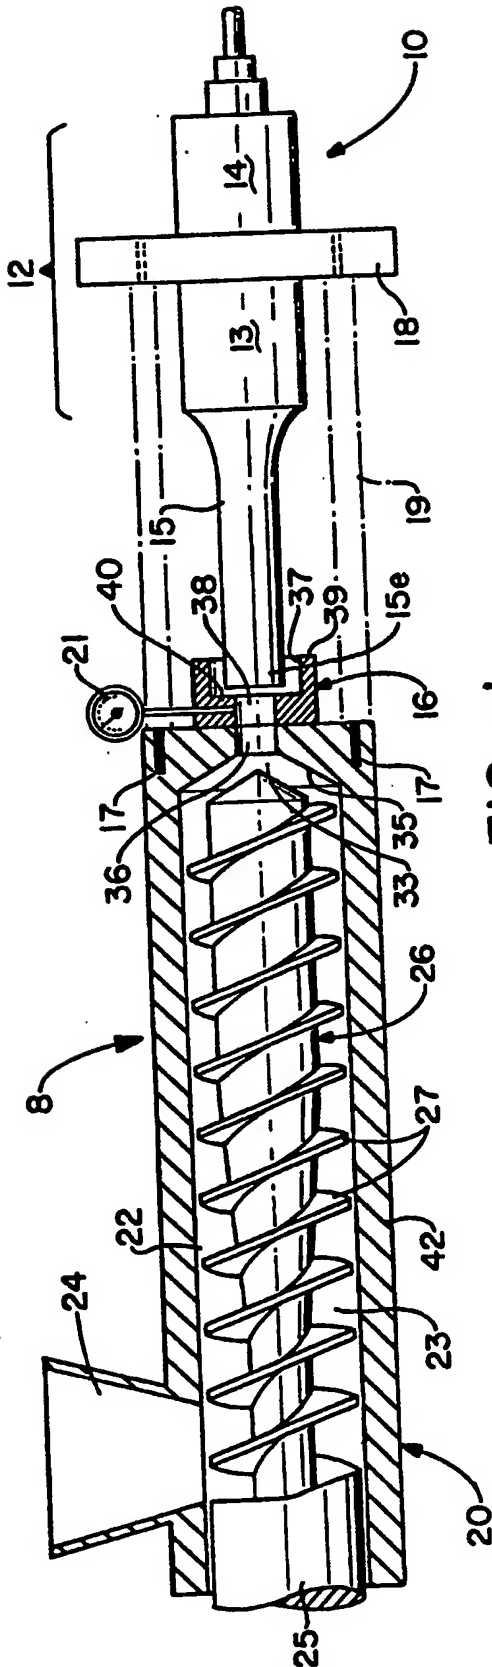


FIG.-1

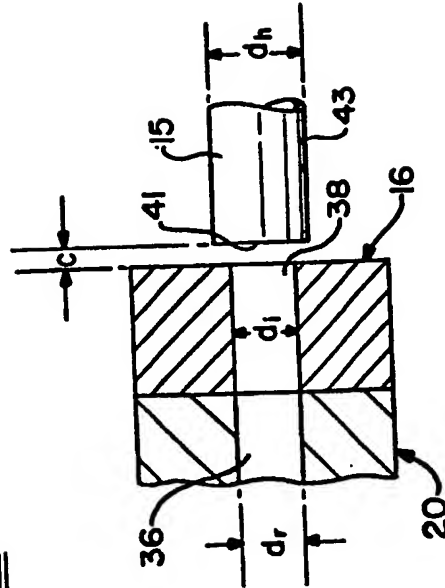


FIG.-3

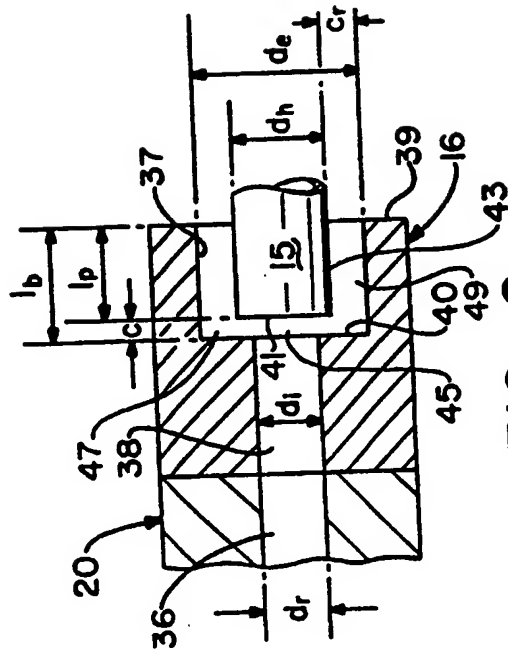


FIG.-2

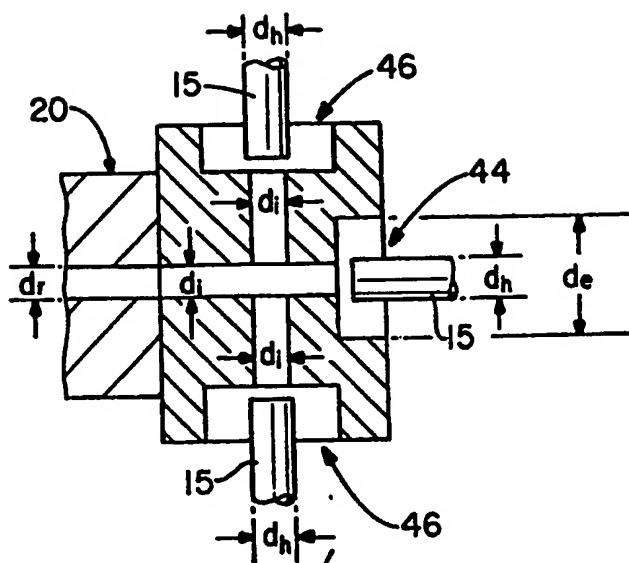


FIG.-4

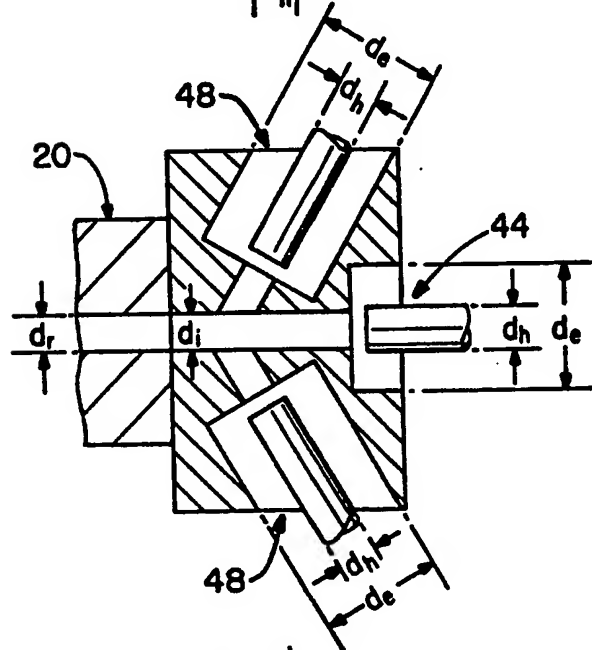


FIG.-5

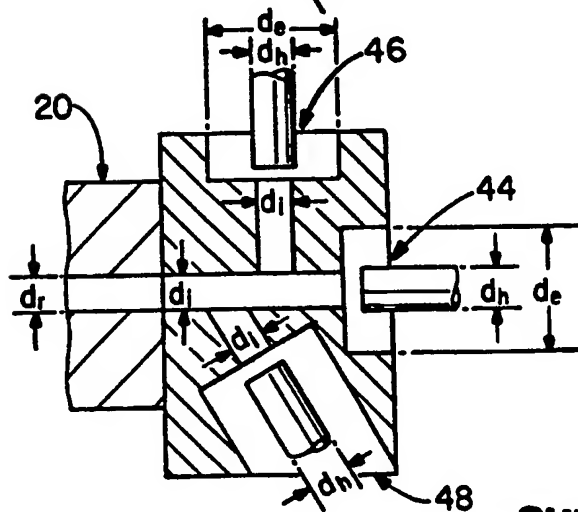


FIG.-6

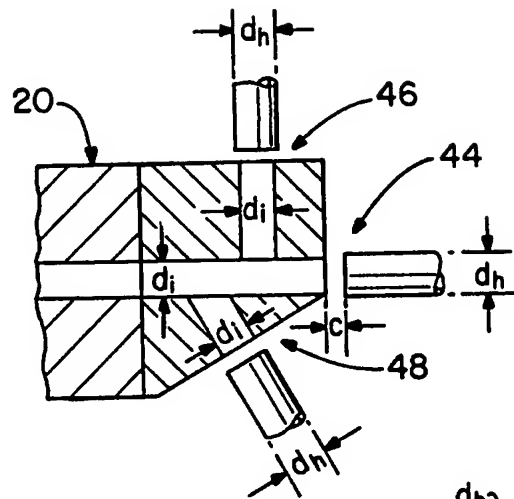
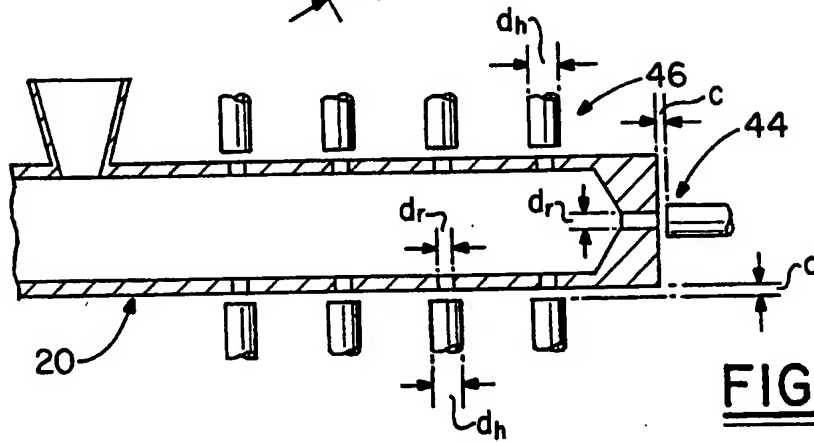
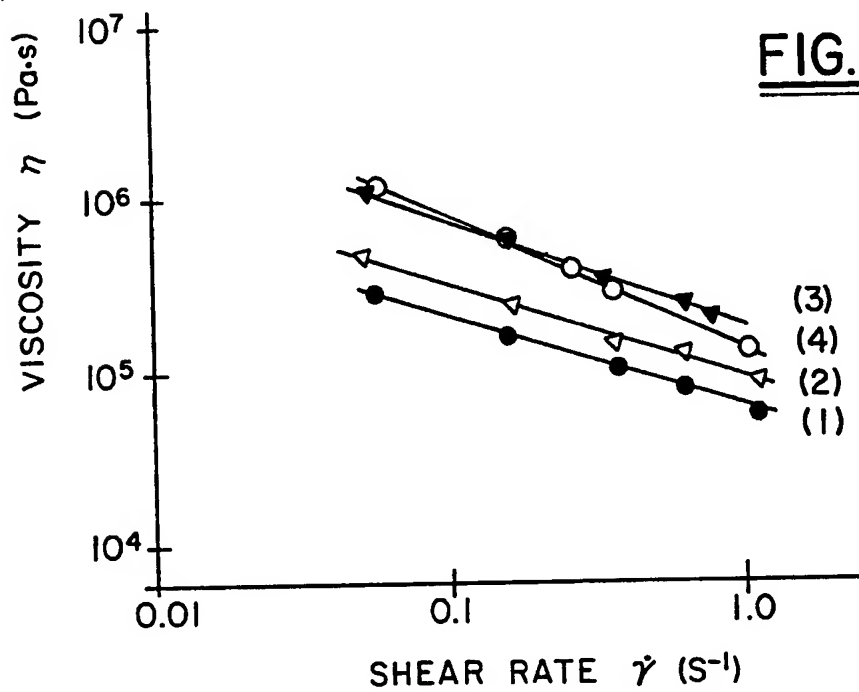
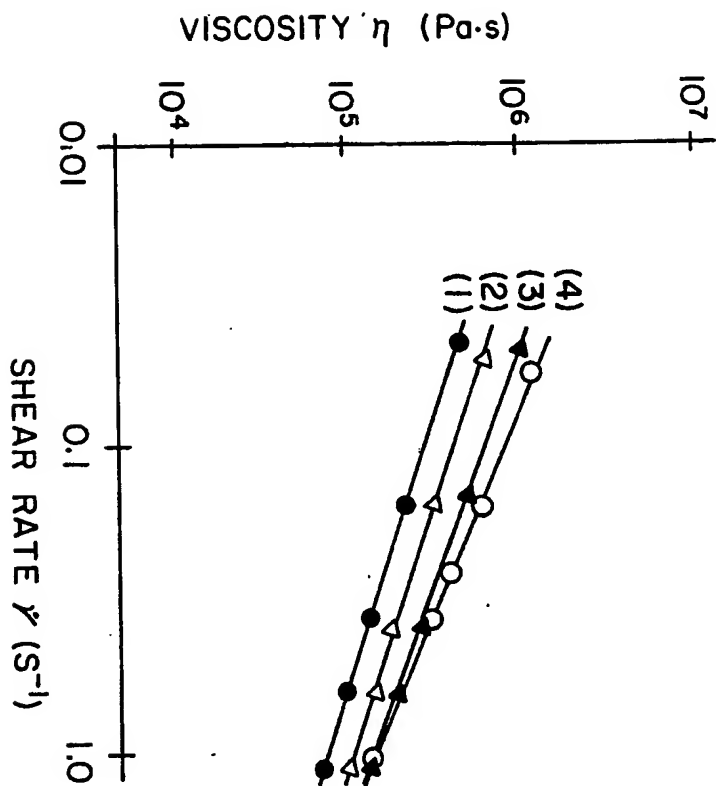
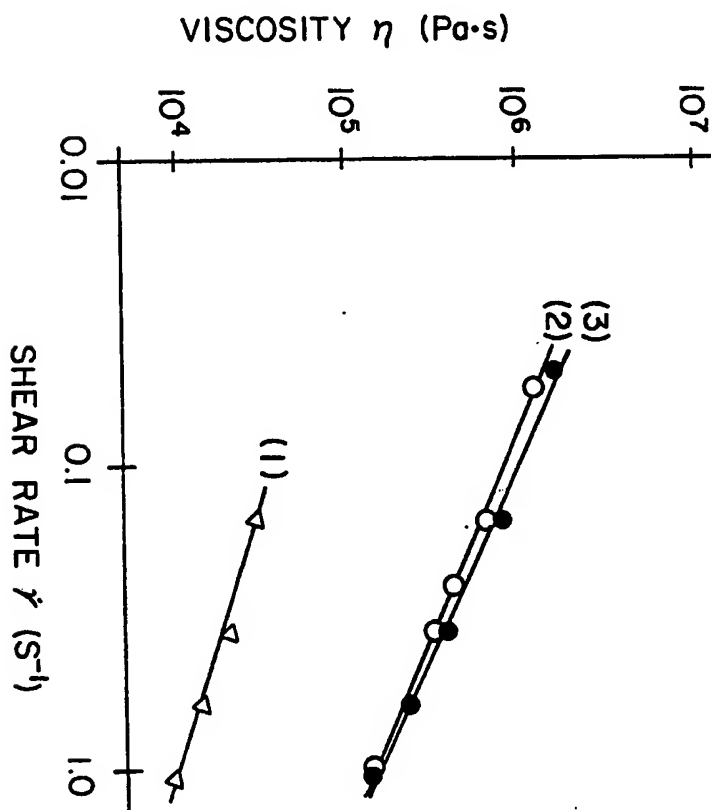
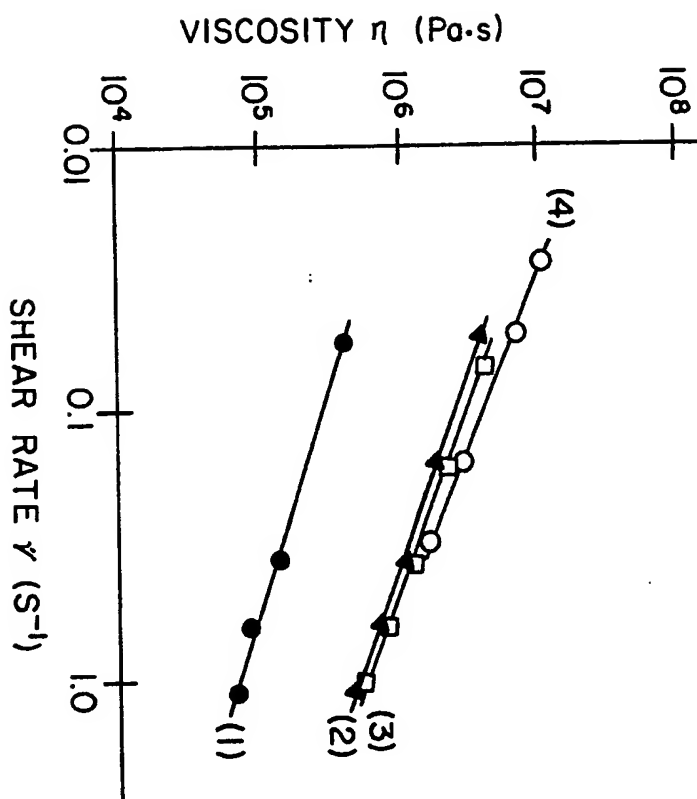
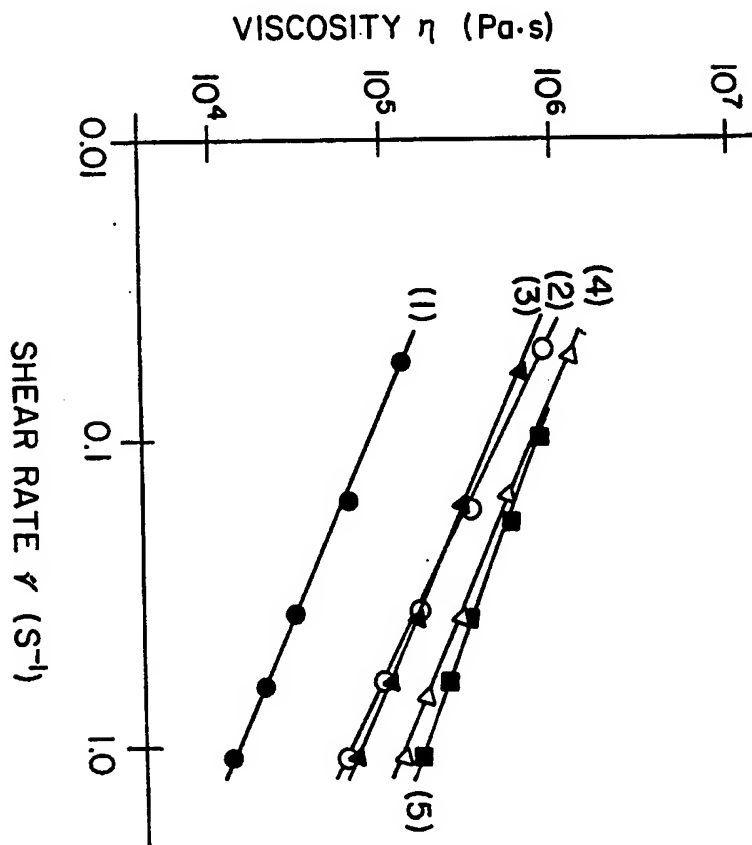
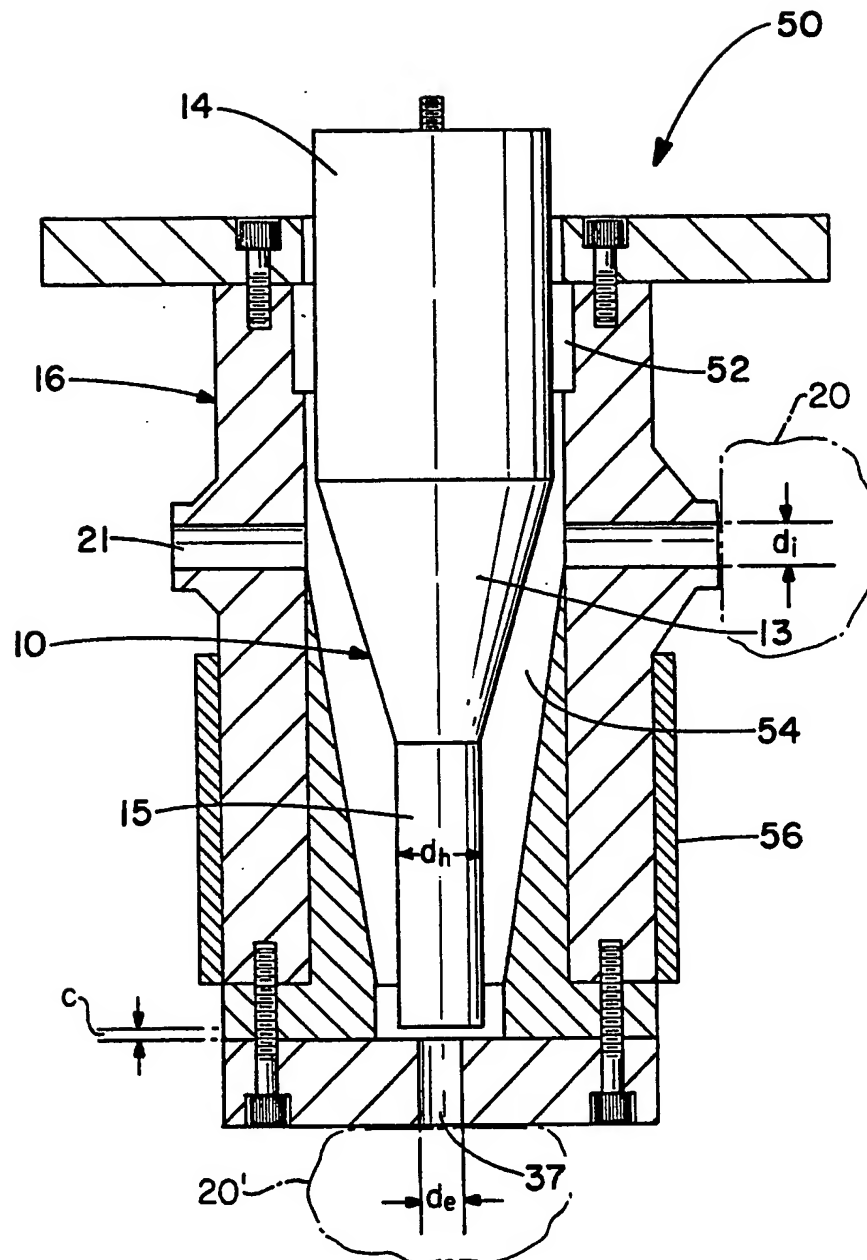
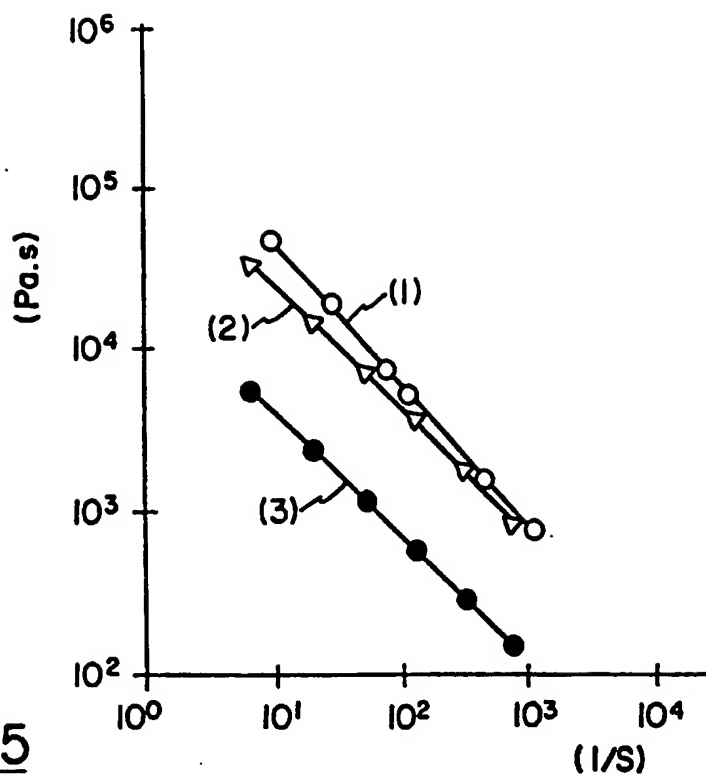
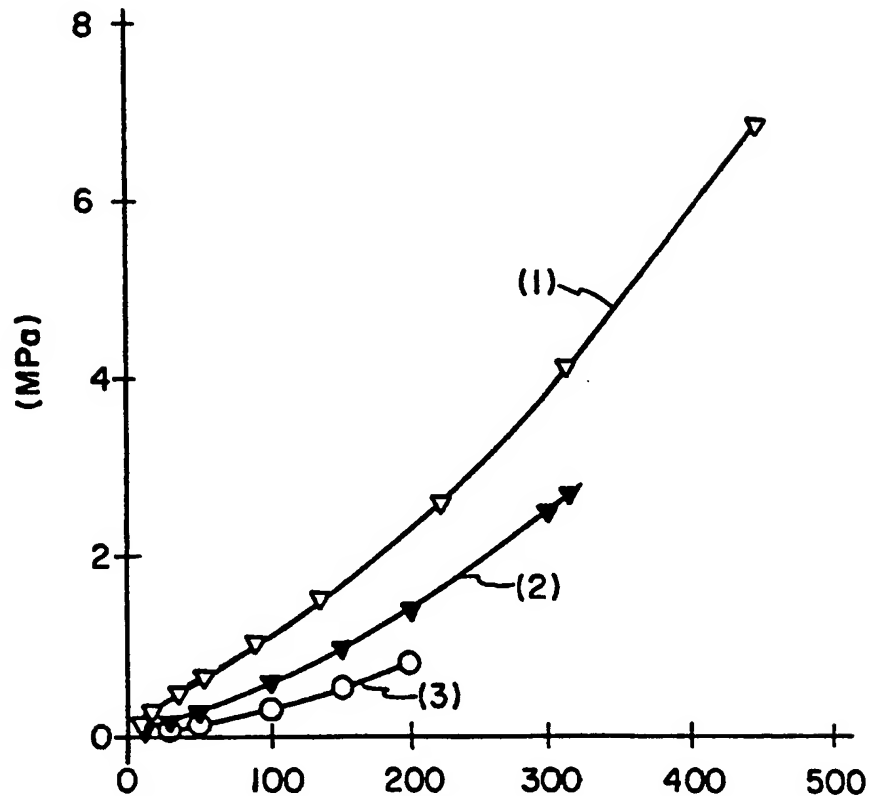
FIG.-7FIG.-8FIG.-9

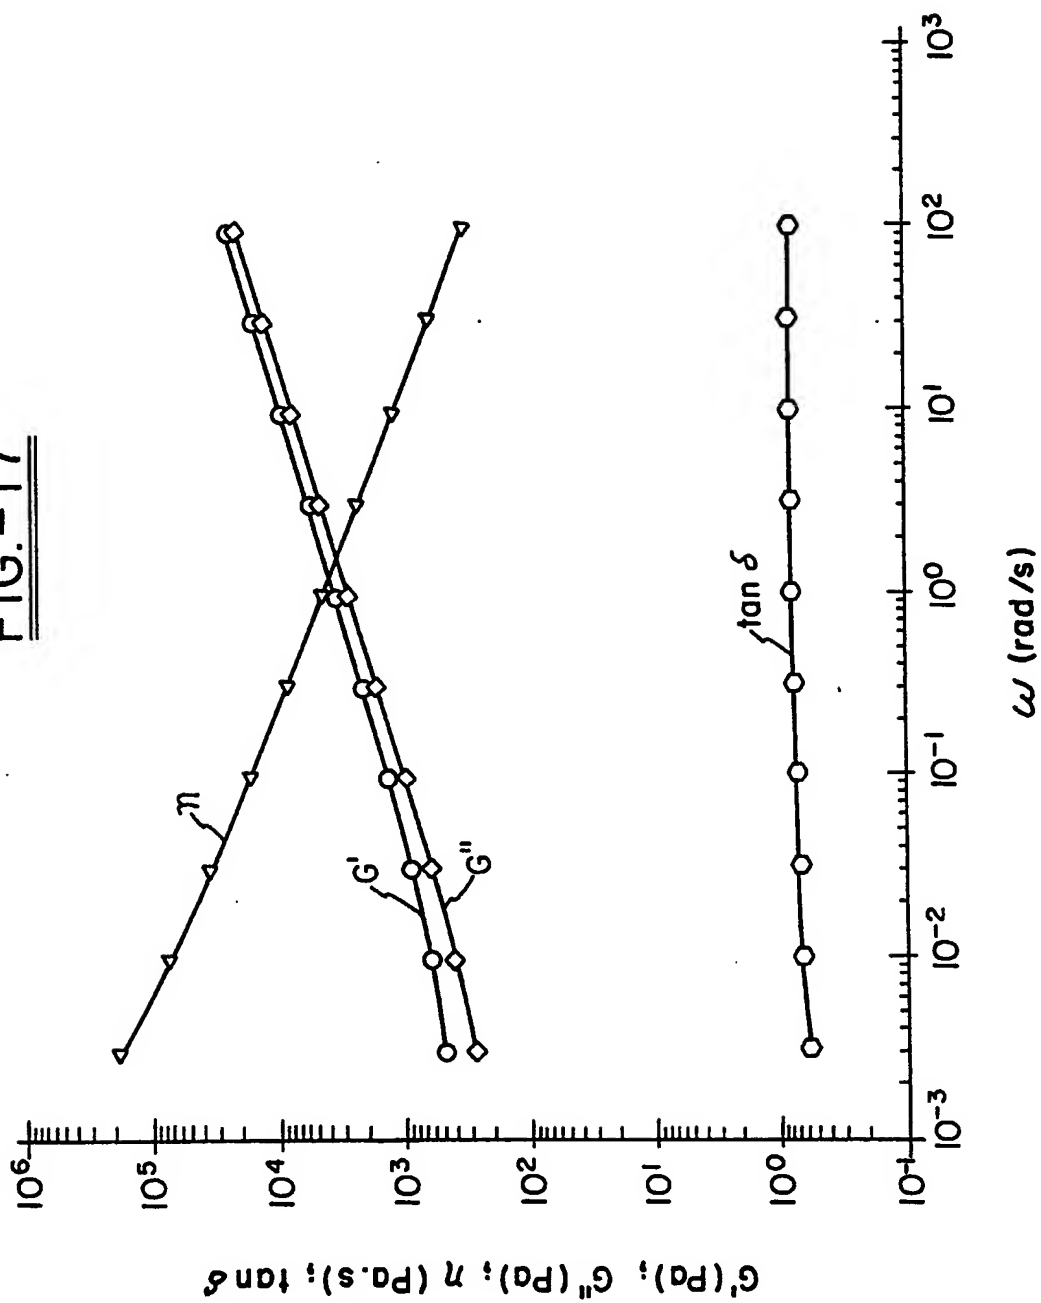
FIG.-10FIG.-11

FIG.-12FIG.-13

FIG. - 14

FIG.-15FIG.-16

SUBSTITUTE SHEET

FIG.-17

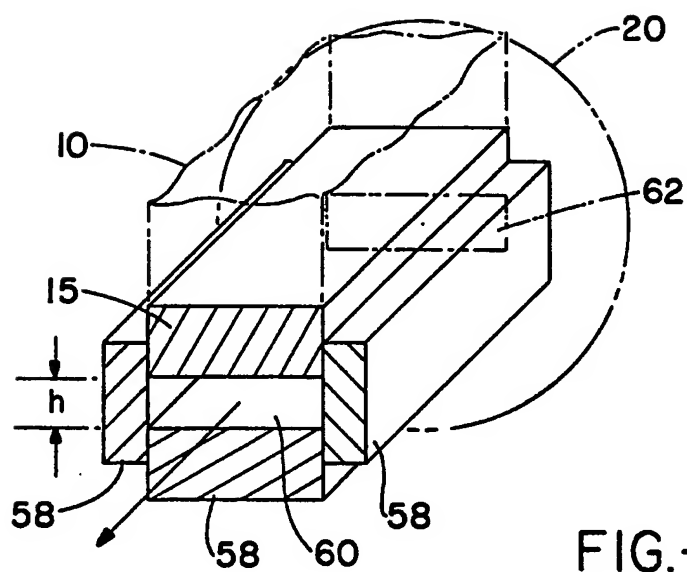


FIG.-18

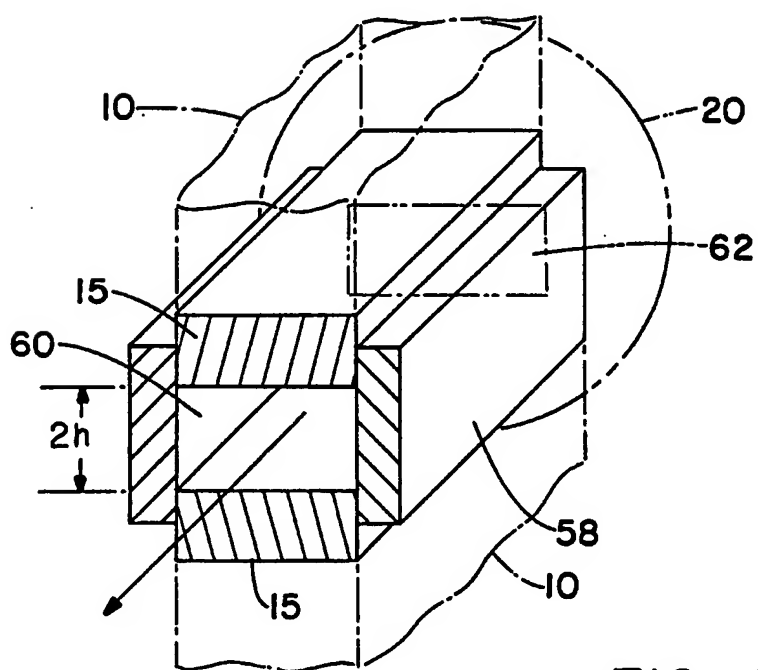


FIG.-19

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US93/05758

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : C08F 2/46, 2/56; B06B 1/00

US CL : 521/40, 40.5, 41, 41.5, 44.5, 45.5; 422/128

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 521/40, 40.5, 41, 41.5, 44.5, 45.5; 422/128

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

US PTO APS TEST (reactor, ultrasonic wave or ultrasonic energy, devulcanization)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 3,725,314 (PELOFSKY) 03 APRIL 1973	1-18
A	US, A, 4,104,205 (NOVOTNY ET AL.) 01 AUGUST 1978	1-18
A	US, A, 4,168,295 (SAWYER) 18 SEPTEMBER 1979	1-18
A	US, A, 4,379,724 (KASHIWAGI) 12 APRIL 1983	1-18
A	US, A, 5,006,266 (SCHRAM) 09 APRIL 1991	1-18

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A		document defining the general state of the art which is not considered to be part of particular relevance
* E		earlier document published on or after the international filing date
* L		document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
* O		document referring to an oral disclosure, use, exhibition or other means
* P		document published prior to the international filing date but later than the priority date claimed
	* X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
	* Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
	* G	document member of the same patent family

Date of the actual completion of the international search

11 AUGUST 1993

Date of mailing of the international search report

20 SEP 1993

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

OLGA ASINOVSKY

Telephone No. (703) 308-2351